



REQUEST FOR QUOTATION

The Civil Aviation Authority of the Philippines (CAAP-Main Office), through its Canvass and Contract Committee (CCC), will undertake a Small Value Procurement for the **“Supply, delivery and installation of 5 units ACU Inverter Window Type 1.5HP and 3 units ACU Inverter Split Type 2HP”** in accordance with Section 53.9 of the Implementing Rules and Regulations of Republic Act No. 9184.

RFQ No. : **C22-061-07**

Name of Project : **Supply, delivery and installation of 5 units ACU Inverter Window Type 1.5HP and 3 units ACU Inverter Split Type 2HP**

Approved Budget for: **Php540,000.00**

Specifications : See the attached Annex “B” for specifications

Location : Procurement Division, CAAP, MIA Road, Pasay City

Delivery Term : **Thirty (30) calendar days** from the receipt of Notice for Compliance

Interested suppliers are required to submit their valid and current following documents in a sealed envelope:

1. Mayor's or Business Permit issued by the city or municipality where the principal place of business of the prospective bidder is located, or the equivalent document for Exclusive Economic Zones or Areas;
2. Income/Business Tax Return for ABC's above P500,000.00;
3. PHILGEPS Registration Number;
4. Tax Clearance;
5. Notarized Omnibus Sworn Statement (GPPB prescribed Form) for ABC's above P50,000; (Authorized representative must attach Special Power of Attorney (SPA) for Sole Proprietorship Certificate/Secretary Certificate for Corporation)
6. Price quotation from (Annex “A”) during submission of offer/Quotation and,
7. Brochure

Price quotation/s must be valid for a period of **one hundred twenty (120)** calendar days from the date of submission.

Quotations exceeding the Approved Budget for the Contract shall be rejected.

Award of contract shall be made to the lowest quotation, which complies with the minimum description as stated above and other terms and conditions stated in the price quotation form. In case two or more bidders are determined to have submitted the Lowest Calculated/Lowest Calculated and Responsive Quotation, CAAP-CCC shall adopt and employ “draw lots” as the tie breaking method to finally determine the single winning provider in accordance with GPPB Circular 06-2005.

The CAAP-TIAC shall have the right to inspect and/or test the goods to confirm their conformity to the technical specifications.

Any interlineations, erasures or overwriting shall be valid only if they are signed or initialed by the bidder or his/her duly authorized representative/s.

Liquidated damages equivalent to one tenth of one percent (0.1%) of the value of the goods not delivered within the prescribed delivery period shall be imposed per day of delay. CAAP shall rescind the contract once the cumulative amount of liquidated damaged reaches ten percent (10%) of the amount of the contract, without prejudice to other courses of action and remedies open to it.


ALMA BELLA M. GILO
CCC Vice Chairperson



PRICE QUOTATION FORM

Date: _____

The Chairperson
 Canvass and Contract Committee
 Procurement Division, CAAP,
 MIA Road, Pasay City

Sir/Ma'am:

After having carefully read and accepted the terms and conditions in the Request for Quotation, hereunder is our quotation/s for the item/s as follows:

Description			
Supply, delivery and installation of 5 units ACU Inverter Window Type 1.5HP and 3 units ACU Inverter Split Type 2HP			
Specification	QTY.	Unit Price	Total Price
Please see attached specifications at Annex "B"			
Total (Inclusive of VAT)			

(Amount in Words) _____

The above-quoted prices are inclusive of all costs and applicable taxes.

Very truly yours,

 Name/Signature of Representative

 Position

 Name of Company

 Contact No.

 Email Address


TECHNICAL SPECIFICATIONS

1.5 HP WINDOW TYPE INVERTER AIRCONDITIONING UNIT

	Remote	
Capacity	Hp	1.5
Cooling Capacity Rated (min-max)	BTU/H	12,500 (2,283-14,034)
Rated (min-max)	kJ/h-W	13,188 (2,408 - 14,806)
Rated Power	W	1,008
Rated Current	A	4.5
Power Supply	V-,Hz,Ph	230,60,1
EER	kJ/h-W	13.1
Refrigerant		R32
Indoor Airflow	m3/h	438 / 359 / 309
Indoor Noise Level	dB(A)	57
Unit Dimension WxDxH	mm	560 x 670 x 400
Carton Dimension WxDxH	mm	620 x 770 x 440
Weight Net/Gross	Kg	44.4 / 48
Operation Temperature	°C	17-30
Applicable Area	m2	16-24
Warranty		One (1) year on parts and labor; Five (5) years on compressor

• 3DC Inverter System , • Silver ION Anti-Bacterial Filter, • Eco-friendly R32 Refrigerant

IMAGES

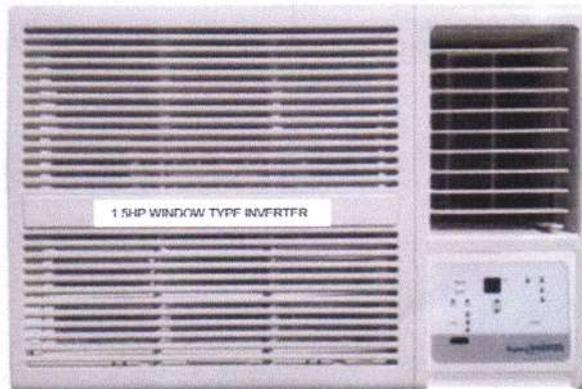

2.0 HP SPLIT TYPE INVERTER AIRCONDITIONING UNIT

	Indoor	Outdoor	
Capacity	Hp		2
Cooling Capacity Rated (min-max)	BTU/H		19,694 (20,000-9,104)
Rated (min-max)	kJ/h-W		20,777 (21,100-9,604)
Rated Power	W		1,510
Rated Current	A		7.6
EER	Btu/H-W		13.0
	kJ/h-W		13.8
Power Supply	V-,Hz,Ph		230,60,1
Refrigerant			R410A
Airflow (Hi/Mi/Lo)	m3/h		891 / 635 / 550
Indoor Noise Level (Hi/Mi/Lo)	dB (A)		45 / 39 / 33
Outdoor Noise Level	dB (A)		57
Unit Dimension	mm		
Indoor Unit	WxDxH		965 x 215 319
Outdoor Unit	WxDxH		800 x 333 x 554
Carton Dimension	mm		
Indoor Unit	WxDxH		1,045 x 305 x 405
Outdoor Unit	WxDxH		920 x 390 x 615
Weight	Kg		
Indoor	Net/Gross		11.2 / 12.7
Outdoor	Net/Gross		31 / 33
Piping Size	In		
Liquid, Gas			1/4" , 1/2"
Max. refrigerant pipe length	m		30.0
Max. difference in level	m		20.0
Operation Temp. Range	°C		17-30
Ambient Temp. Range	°C		18-43
Applicable Area (unloaded space)	m2		23-33
Warranty			One (1) year on parts and labor; Five (5) years on compressor
• 3DC Inverter System , • Silver ION Anti-Bacterial Filter, • Eco-friendly R32 Refrigerant			

IMAGES



Split Type Inverter



EXCELLENT COOLING AND SAVINGS

With the new Super Inverter III, you can save up to 60% on energy consumption. It has advanced sensors to optimize cooling performance and Quadruple Action Air Filter that traps dust particles, releases Vit. C for skin care and plasma ionizer for clean, fresh air.

